


STEIN

LUNAR BATH SCREEN INSTRUCTION MANUAL

PRODUCT CODE: LUNAR BATH SCREEN-STE1218

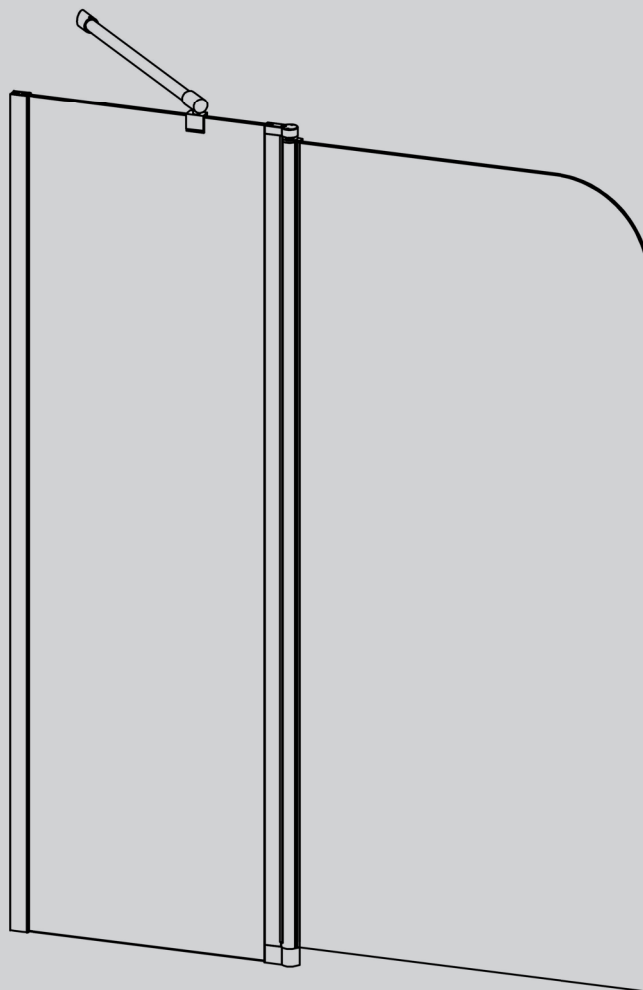

NOV 2023

IMPORTANT!

1. When you receive your Lunar Bath Screen package please check for any freight damage.
2. If damage has occurred advise your supplier within 8 hours.
3. Do not install any faulty product as this will invalidate later claims.

INTRODUCTORY

Thank you for selecting a quality Stein Bathroomware Product.

HEALTH AND SAFETY

- The glass requires two people to handle.
- Always stand glass up after unpacking the components and use soft packing when in contact with hard surfaces. Take care not to strike an edge or corner on a hard surface.
- All glass is toughened and cannot be reworked or drilled.
- Wear protective gloves and eye protection.
- Special care should be taken when drilling walls to avoid hidden pipes or electrical cables.


WARRANTY

- This covers product defects: bath screen 5 years, working parts 2 years and PVC seals 1 year.
- Installation must comply with instructions to be under warranty.
- Damage or breakage on site is not covered in warranty.

MATERIALS REQUIRED

Sika Silaflex NG Silicone (Translucent) - Cleaning materials and Methylated Spirits (from retailer).


TOOLS REQUIRED









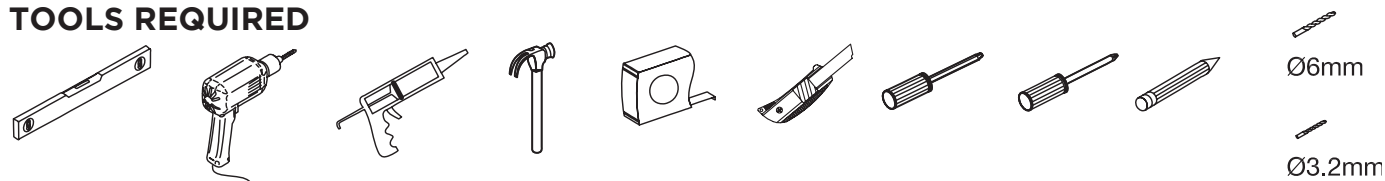


BEFORE YOU START: Read the instructions to understand the scope of the install.

- This swinging glass panel is adaptable to suit bath lips up to 30mm in height. This is achieved with 3 seals in the kit to cover the variable heights (page 7).
- Solid fixing for the Wall Channel and Support Bar is important.
 1. Wall Channel: Bath Lip design governs the positioning of wall channel. View item D on page 5 for stud position. To cover variables, install stud with 90mm face crosswise.
 2. Support Bar: A horizontal stud (90mm face crosswise) centered 1445mm off top of bath and 350mm minimum from vertical stud.
- The wall needs to be plumb and the bath level for a satisfactory installation. Any variations will need to be identified along with planning to overcome this.

WE RECOMMEND A TRADESMAN FAMILIAR WITH THIS TYPE OF INSTALLATION

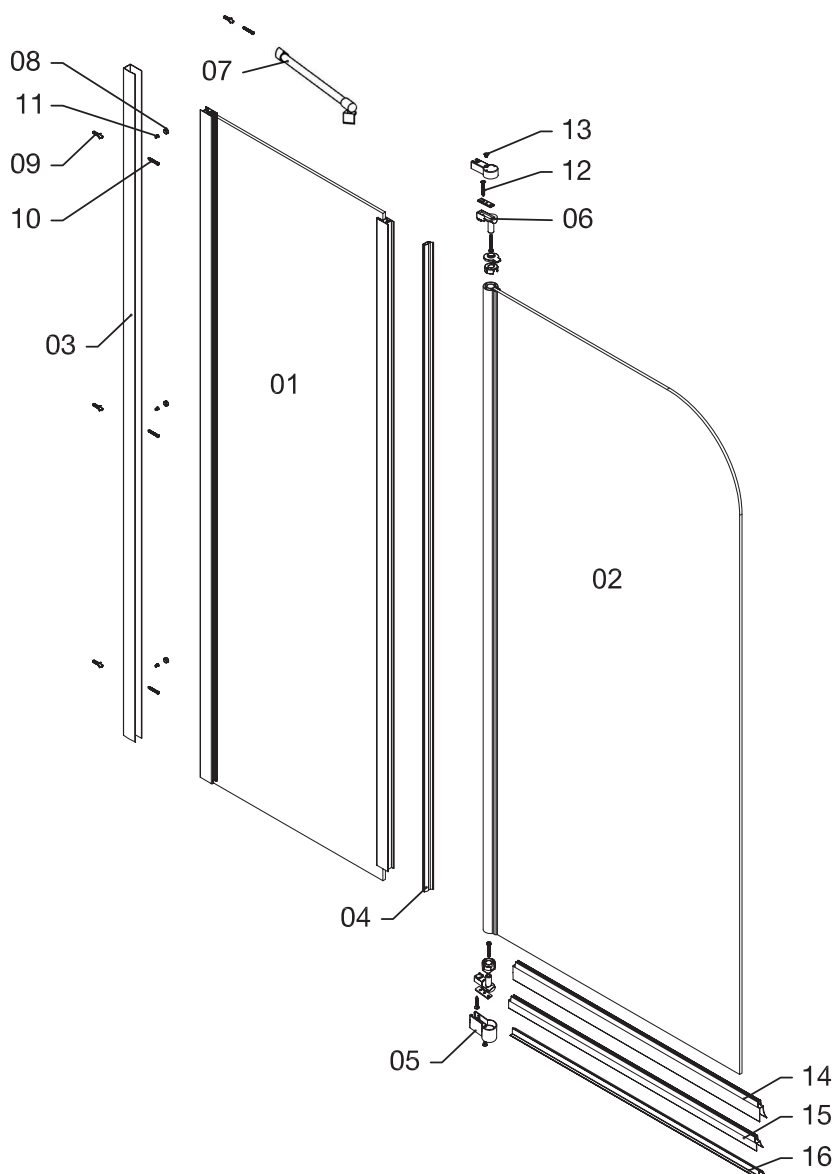

Fixed Glass		Swinging Glass Door		Door Channel PAR3953		Centre Seal PAR5735		Bottom Hinge PAR8224		Top Hinge PAR8217		Support Bar Set PAR8200	
													
01	1 PCS	02	1 PCS	03	1 PCS	04	1 PCS	05	1 PCS	06	1 PCS	07	1 PCS
Screw Pack PAR8231													
Cap		Wall Plug for Concrete		Screw 3.5x35mm		Screw 4x10mm		Screw 3.5x30mm		Screw 4x6mm		30mm Seal PAR2147	
													
08	3 PCS	09	4 PCS	10	4 PCS	11	3 PCS	12	2 PCS	13	2 PCS	14	1 PCS
		Ø6*30										15mm Seal PAR2154	
												Adhesive Deflector Seal PAR2161	
													

WALL CHANNEL ADJUSTMENT

1100mm (Minimum) to 1115 (Maximum)

DIAGRAM 1

Fit parts to door.



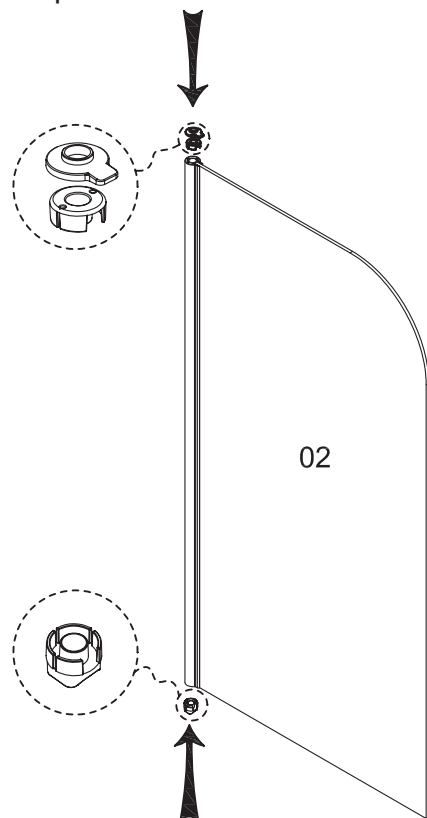


DIAGRAM 2


Component assembly door to fixed glass.

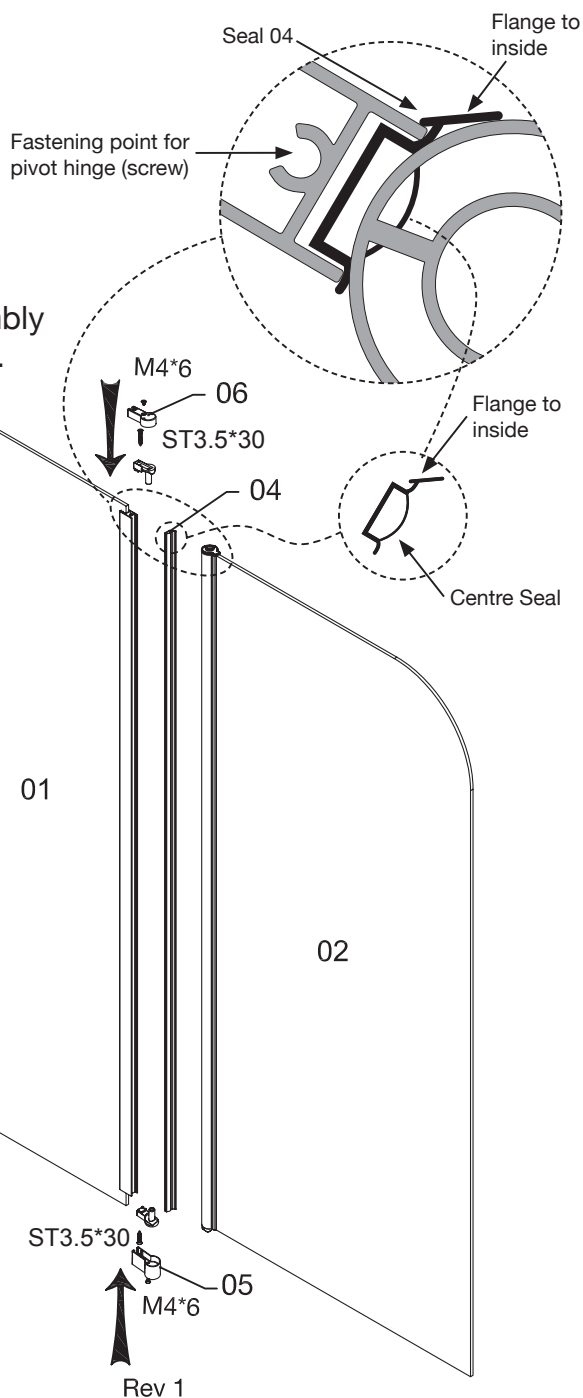

Bottom Hinge Assembly (05)

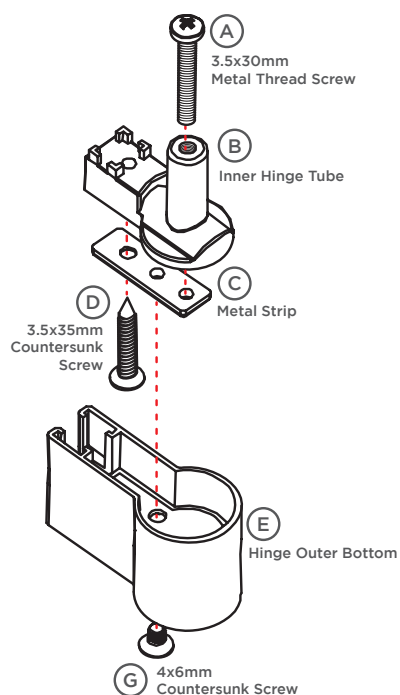

Top Hinge Assembly (06)

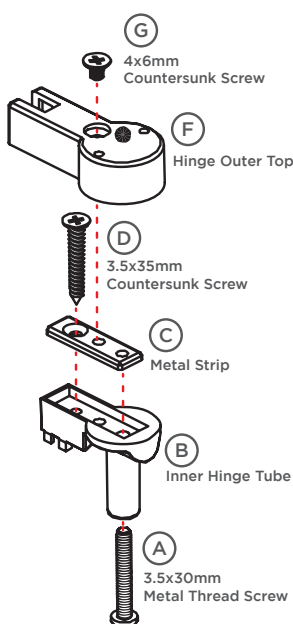

Assembly of Fixed Glass to Door Glass


1. The top and bottom hinges come assembled. Remove hinge outer cover by removing small countersunk screw G.
2. Screw on bottom hinge (Largest Hinge 05) & outer cover. Fit centre seal (04), place swinging door into bottom hinge and fasten top hinge and cover.

Centre Seal Note: Work bulge side inwards starting in the middle and out each end to fit best to curved profile.

LOCATION OF WALL CHANNEL

3

Do not install on top of bath lip.

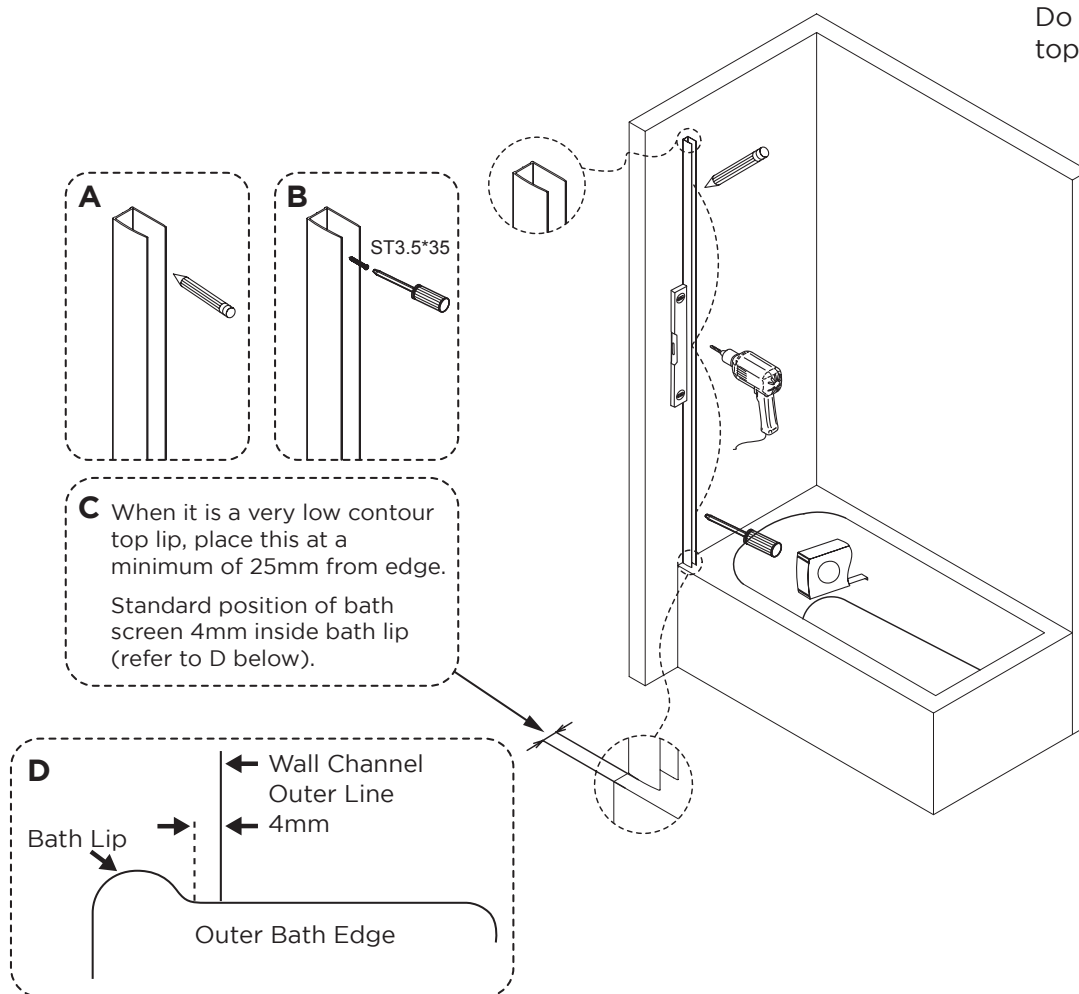


4 Fit assembled bath screen into wall channel and check a parallel gap under door is achievable.


NOTE:

If you have a 30mm bath lip, raise the height of the fixed glass 3mm above the bath.


This will ensure sufficient clearance of the lip.

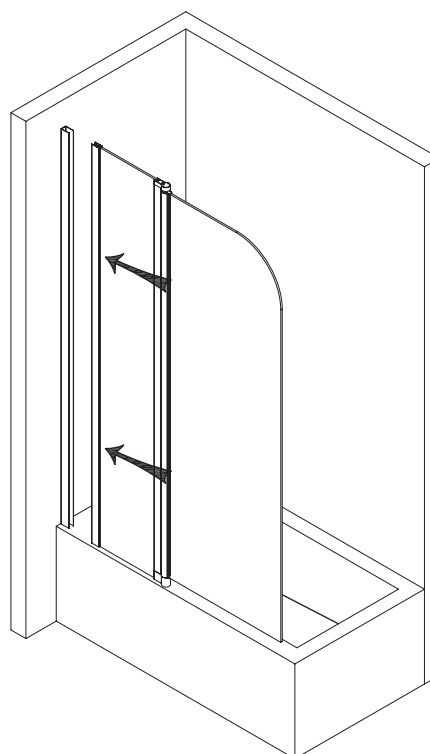


5 Pack under door establish a parallel gap preferably slightly greater at door end.

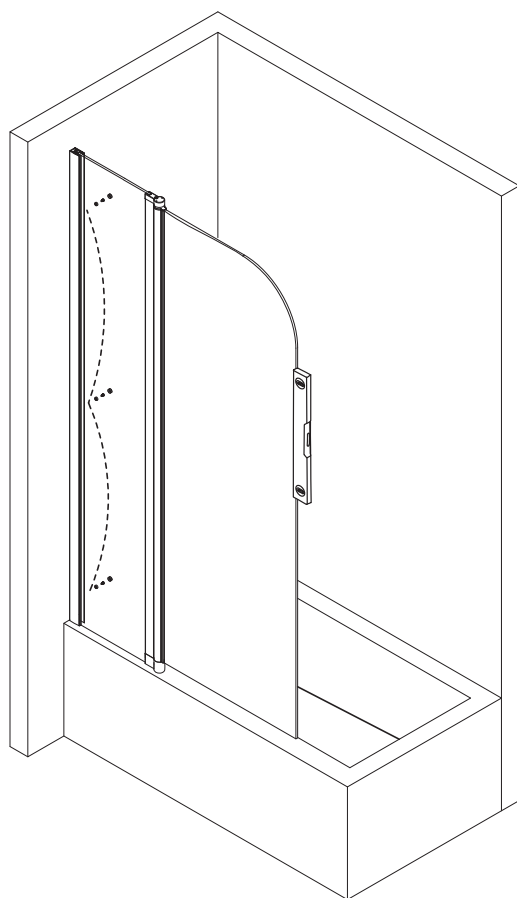

Drill & fasten frame to wall channel on inside.

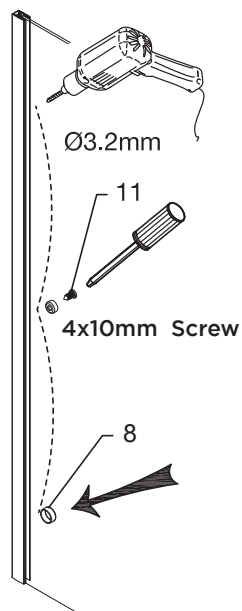


6 Attach support bar.

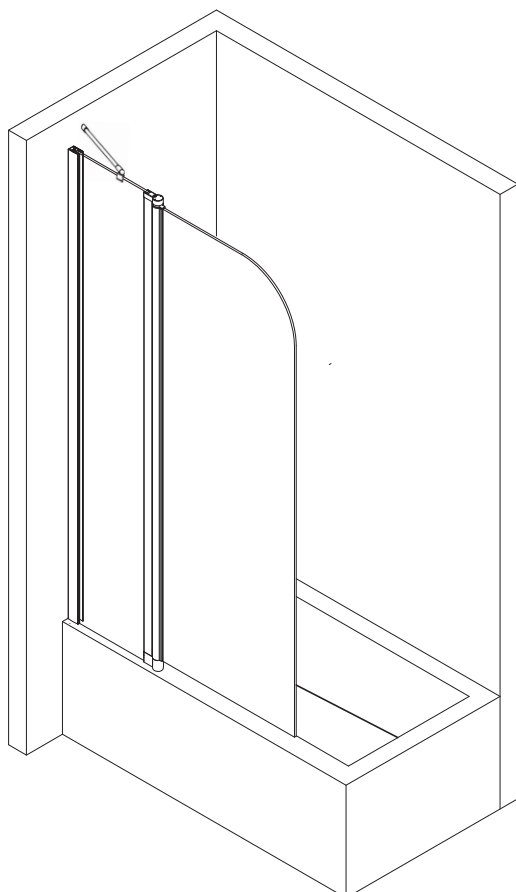


A

Assemble support arm on glass.

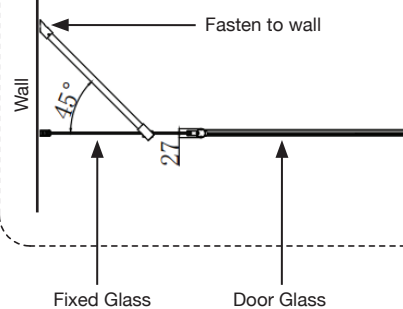

7 Choose applicable door bottom seal and trim to length and install.

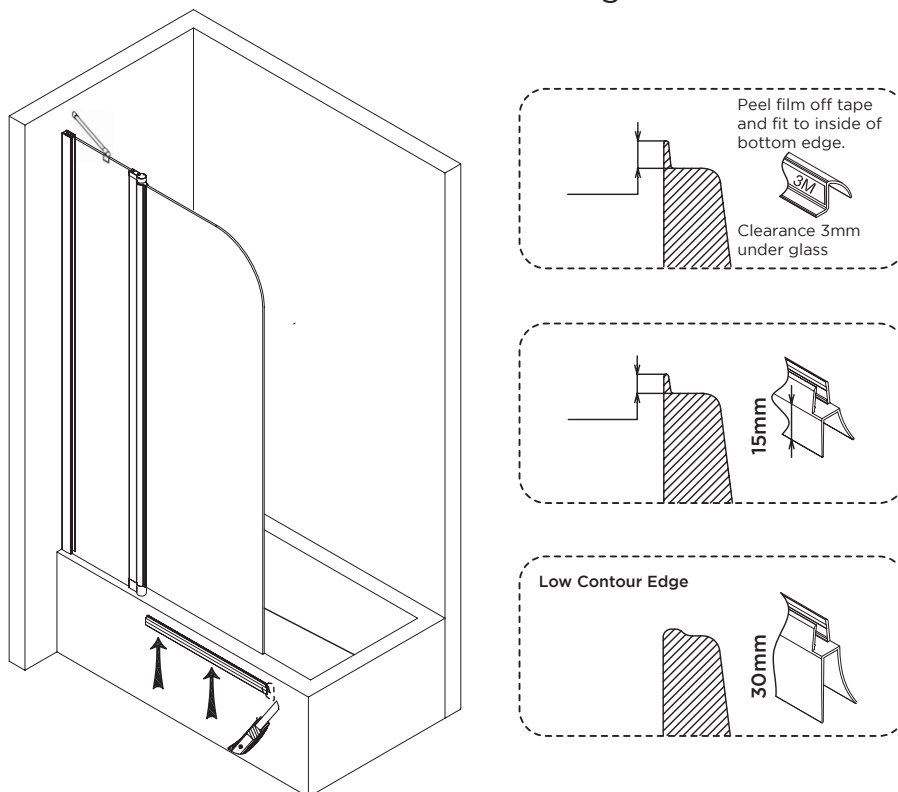


8 Silicone seal join as indicated and inside base of hinge.

NOTE: If 30mm Bath Lip.

If you have installed the screen with up to a 3mm gap under the fixed glass and hinge. Remove fastenings on wall channel but leave top in place. Lift and silicone fully under hinge as arrow below, lower and refasten screen to wall channel.



Allow 36 hours min. for silicone to cure before use.

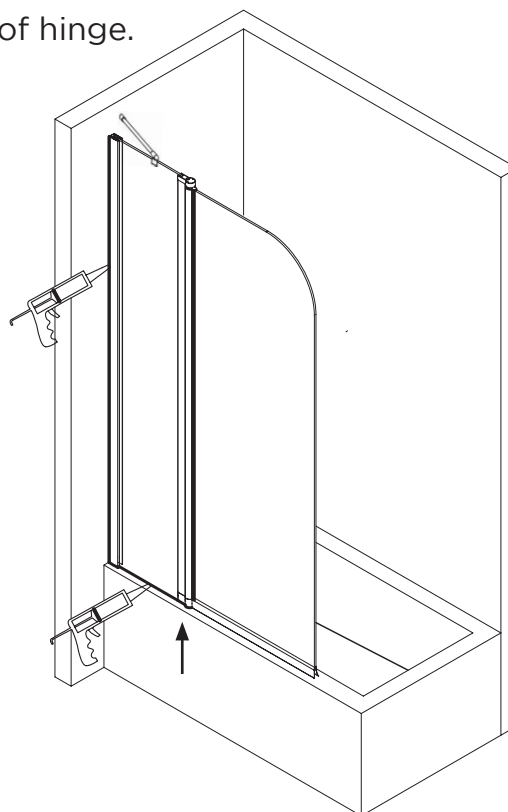

54 Unutoto Place, Tauriko, Tauranga, 3171

Freephone: 0800 002 299

Phone: 07 928 9990

Email: info@stein.co.nz

stein.nz