


STEIN

NOVO BATH SCREEN INSTRUCTION MANUAL

PRODUCT CODE: NOVO II BATH SCREEN-STE1201

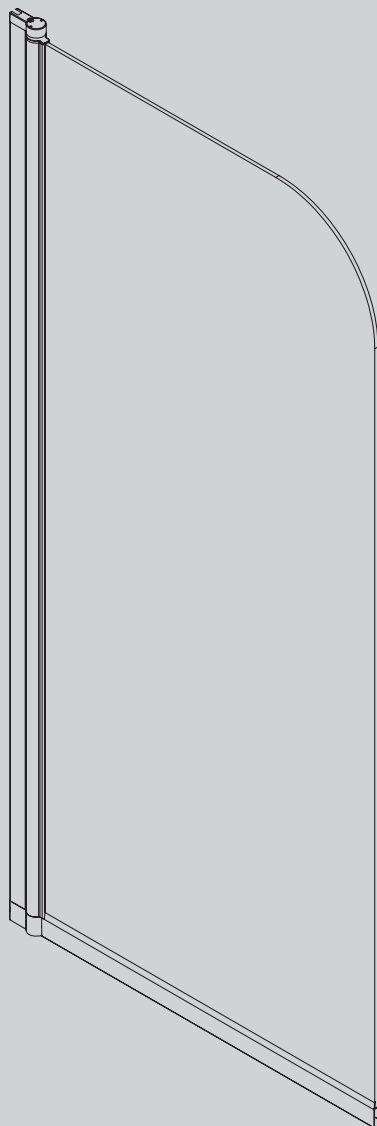

NOV 2023

IMPORTANT!

1. When you receive your Novo Bath Screen package please check for any freight damage.
2. If damage has occurred advise your supplier within 8 hours.
3. Do not install any faulty product as this will invalidate later claims.

INTRODUCTORY

Thank you for selecting a quality Stein Bathroomware Product.

HEALTH AND SAFETY

- The glass requires two people to handle.
- Always stand glass up after unpacking the components and use soft packing when in contact with hard surfaces. Take care not to strike an edge or corner on a hard surface.
- All glass is toughened and cannot be reworked or drilled.
- Wear protective gloves and eye protection.
- Special care should be taken when drilling walls to avoid hidden pipes or electrical cables.


WARRANTY

- This covers product defects: bath screen 5 years, working parts 2 years and PVC seals 1 year.
- Installation must comply with instructions to be under warranty.
- Damage or breakage on site is not covered in warranty.

MATERIALS REQUIRED

Sika Silaflex NG Silicone (Translucent) - Cleaning materials and Methylated Spirits (from retailer).


TOOLS REQUIRED

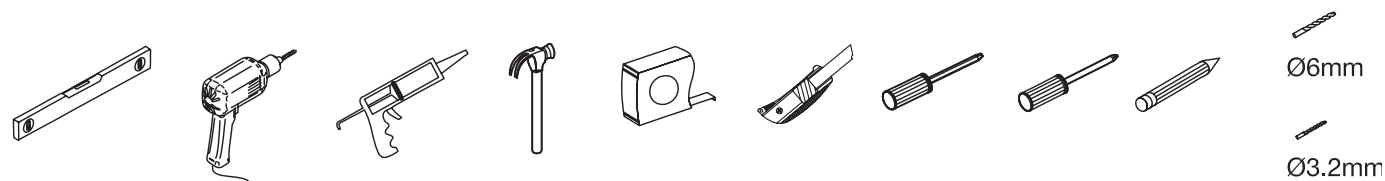








BEFORE YOU START: Read the instructions to understand the scope of the install.

- This swinging glass panel is adaptable to suit bath lips up to 30mm in height. This is achieved with 3 seals in the kit to cover the variable heights (page 7).
- Solid fixing for the Wall Channel is important. Bath Lip design governs the positioning of wall channel. View item D on page 4 for stud position. To cover variables, install stud with 90mm face crosswise.
- The wall needs to be plumb and the bath level for a satisfactory installation. Any variations will need to be identified along with planning to overcome this.

WE RECOMMEND A TRADESMAN FAMILIAR WITH THIS TYPE OF INSTALLATION

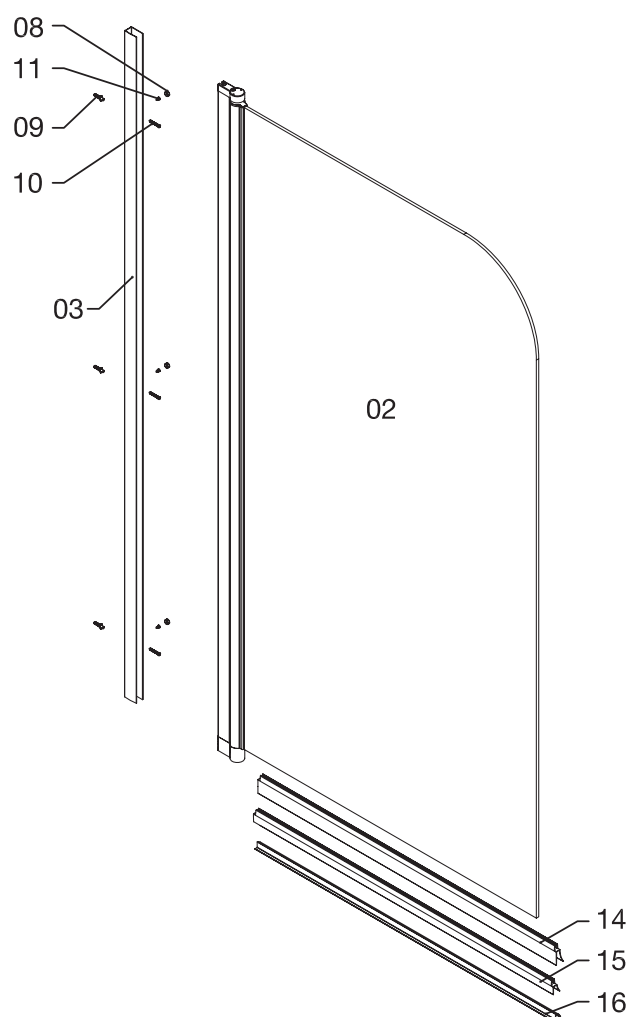


Items designated with an Asterisk (★) are already assembled in this Bath Screen

Swinging Glass Door  02 1 PCS		Door Channel PAR3953  03 1 PCS		Centre Seal PAR5735  04 ★ 1 PCS		Bottom Hinge PAR8224  05 ★ 1 PCS		Top Hinge PAR8217  06 ★ 1 PCS	
Screw Pack PAR8231									
Cap  08 3 PCS	Wall Plug: Concrete  Ø6*30 09 3 PCS	Screw 3.5x35mm  10 3 PCS	Screw 4x10mm  11 3 PCS	Screw 3.5x30mm  12 ★ 2 PCS	Screw 4x6mm  13 ★ 2 PCS	30mm Seal PAR2147  14 1 PCS	15mm Seal PAR2154  15 1 PCS	Adhesive Deflector Seal PAR2161  16 1 PCS	

LOCATION OF WALL CHANNEL


1

Do not install on top of bath lip.

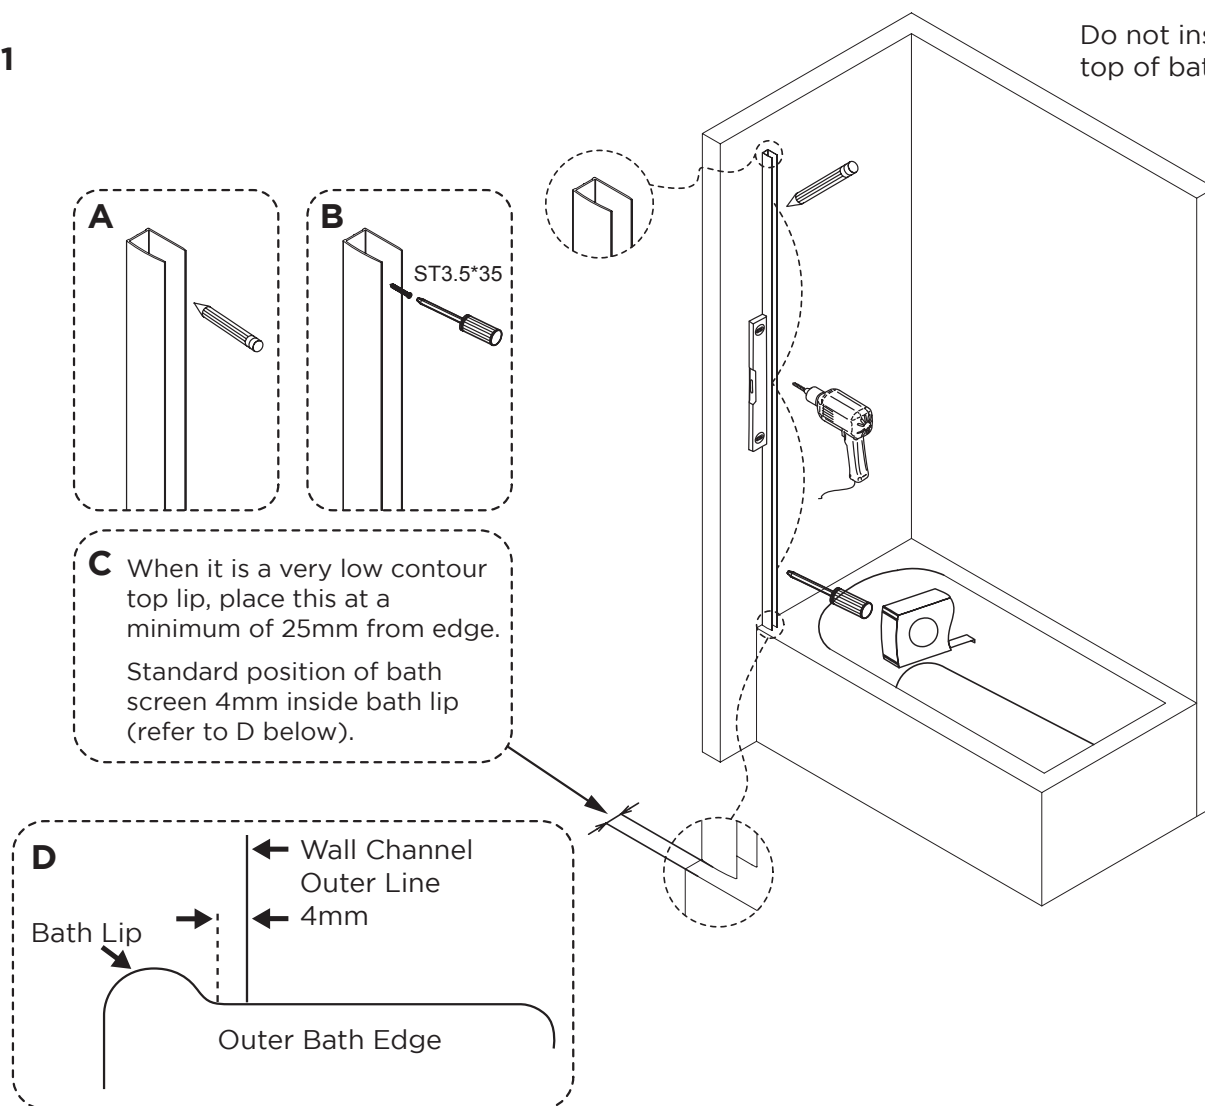

2 Fit assembled bath screen into wall channel.

Ensure the gap under door is parallel preferably slightly greater at outer end of door.

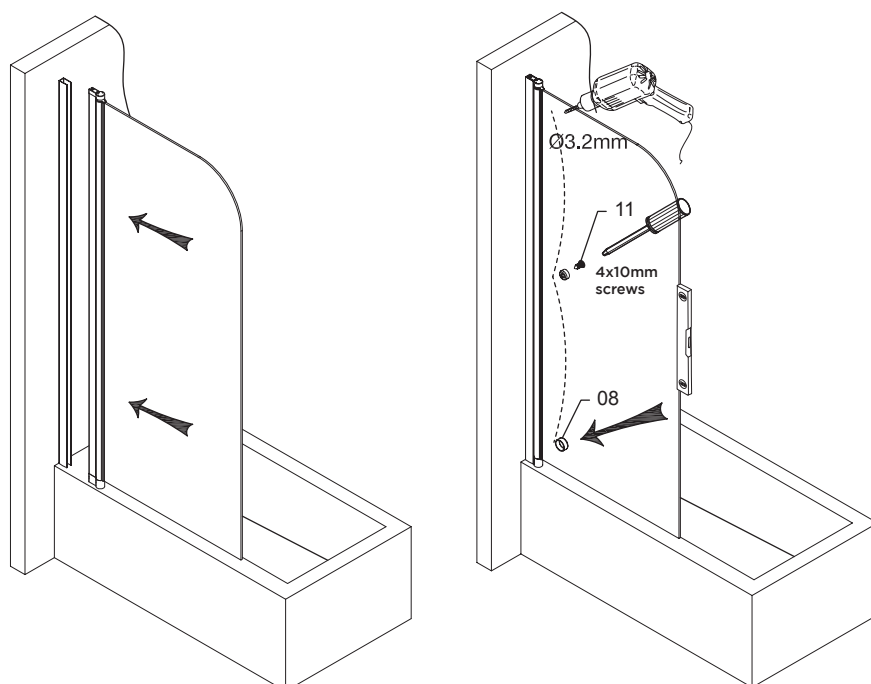


NOTE:

If you have a 30mm bath lip, raise the height of the fixed glass 3mm above the bath.

This will ensure sufficient clearance of the lip.

3 Choose applicable door bottom seal and trim to length.

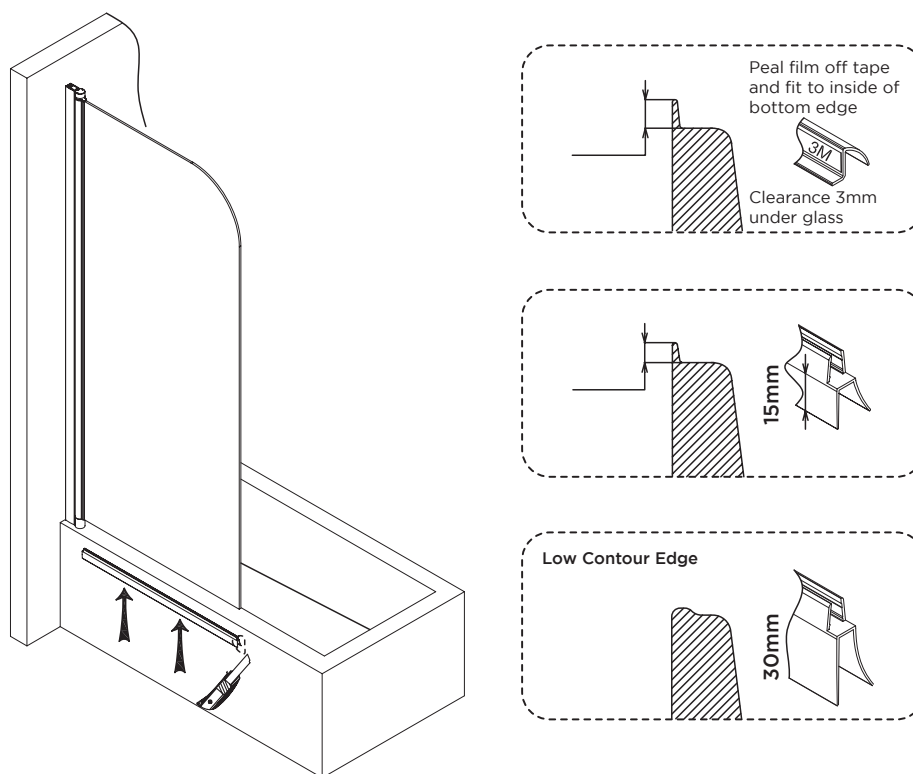


4 Silicone seal join as indicated.

NOTE: If 30mm Bath Lip.

If you have installed the screen with up to a 3mm gap under the fixed glass and hinge, remove fastenings on wall channel. Lift and silicone fully under hinge as arrow below, lower and refasten screen to wall channel.



Allow 36 hours min for silicone to cure.

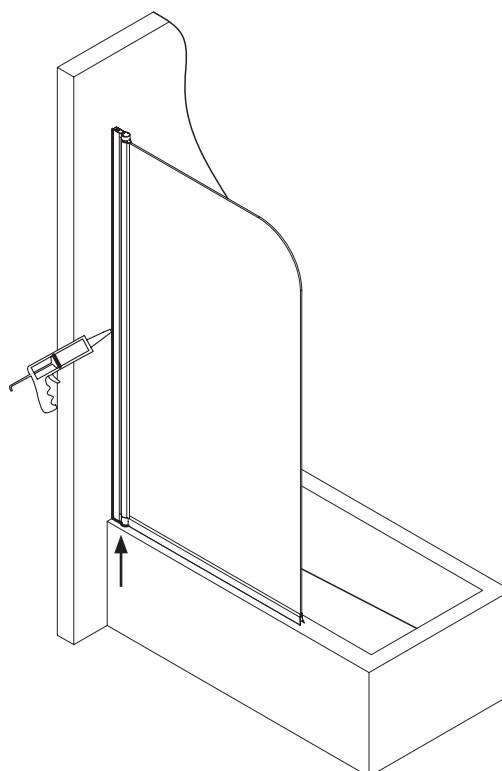

54 Unutoto Place, Tauriko, Tauranga, 3171

Freephone: 0800 002 299

Phone: 07 928 9990

Email: info@stein.co.nz

stein.nz