



AS1172.1  
WMKAG40214  
GLOBAL MARK

## FEATURES

- One click removable seat for easy cleaning
- Rimless Fully Glazed
- Wels 4 Star 4.5/3 Litres per flush
- Heavy duty soft close seat
- WaterMark Flush & Inlet Valves
- Toilet Pan & Cistern: 10 Years, Valves 2 Years
- Includes S trap pan connector (set out 80-140mm).

## COLOUR



## FINISH





GLOSS

## SIZES

Width (mm) 360mm  
Depth 610mm

Pan Height 405mm (Excluding Seat)

## SPECIFICATIONS

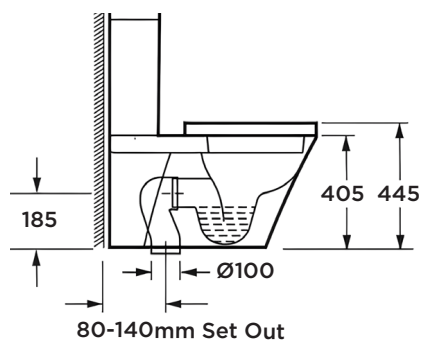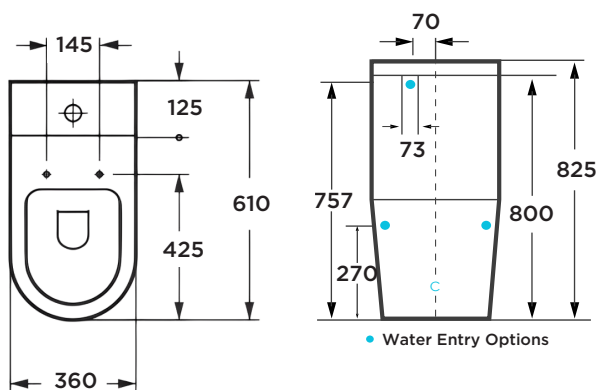


**Note:** Toilet is supplied for concealed top water entry.


Drawing shows LH & RH bottom water entry points that a plumber can utilise with additional hoses and fittings.

Next page - Valve information

## CISTERN VALVE LAYOUT

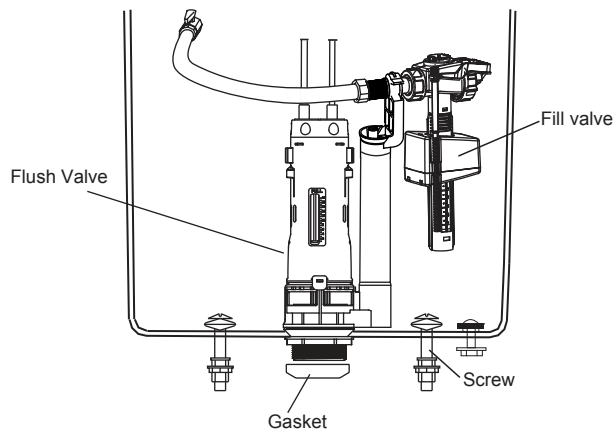


### Inlet

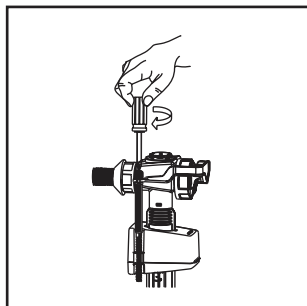


Flush water pipe, connect valve and adjust water level.

### Controls

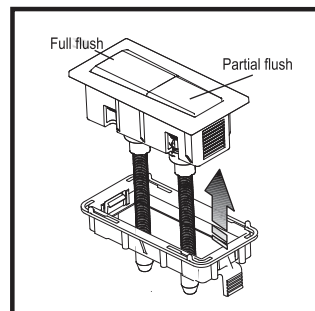


Aline full flush & part full, trim rods to length. Fasten unit to cistern lid.

### Full Flush

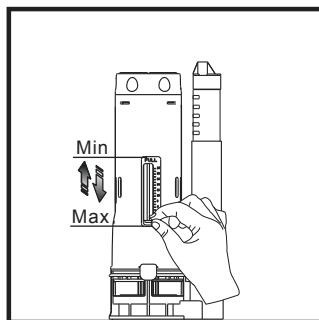

### Part Flush

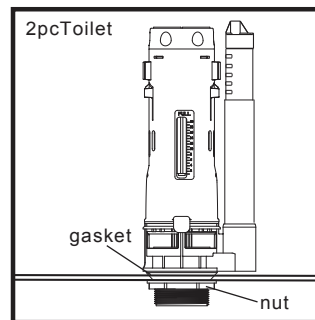

Full or Part Flush. Unlock red tab, move in direction of Min or Max and relock



**If the components are different from this drawing, please take the product as correct.**

# PRODUCT INFORMATION

**COMPONENT ONE:** Toilet

**CLASS:** One

## DESCRIPTION

Ero toilets are back to wall hygienic rimless design with ceramic glazes cistern and pan. The seat is heavy duty plastic with soft-close action. The unit is available in gloss white colour only and includes an adjustable set-out (80-140mm).

## CONTRIBUTIONS TO COMPLIANCE

E3.3.5 and E3.3.6: Flush and inlet valves comply to Watermark AS11722: 1. The Ero toilet features a 4-star WELS rating in accordance with AS/NZ6400, with a 4.5/3L dual-flush system, and an average of 3.3 liters per flush.

B2.3.1 (c) (i) and (ii): Ero toilets have a warranted durability of 10 years when maintenance standards are adhered to for the cistern valve and pan. The seat warranty is 12 months.

G1.1 (a) and G1.3.2: Ero toilets can be easily cleaned with soapy water and where needed, a standard toilet brush. Water connections should be correctly installed by a licensed plumber to ensure appropriate discharge to the plumbing/drainage system as per G1.3.2 Foul Water.

## SCOPE OF USE

- Domestic and commercial bathrooms, including residential homes, government housing, hotels and apartments.
- Suitable for use with cold and warm water. Limitations to warranties apply where water supplies of geothermal influence, pH imbalance or heavy mineral loadings exist.
- Determine position of piping and plumbing prior to installation.

## CONDITIONS OF USE

- Must be installed in accordance with Stein Ero Toilet Specifications. Pipe connections must have been correctly installed by a registered plumber. Installation must comply with NZ Building Code to be under warranty.
- Cleaning products including bleaches, solvents, alcohol, citrus based chemicals, bath oils and/or abrasive cleaners should not be used. Full list is outlined in aftercare document.

## CONTACT DETAILS

Location: NZ for Local and Imported Products  
Legal and Trading Name of Manufacturer:  
Newline Group Ltd

Importer Address for Service:  
54 Unutoto Place, Tauranga, 3171

Importer Website: [stein.nz](http://stein.nz)  
Importer Email: [sales@stein.co.nz](mailto:sales@stein.co.nz)  
Importer Phone Number: 0800 002 299

## SUPPORTING DOCUMENTATION

The following additional documentation supports the above statements:

Aftercare and Maintenance  
Warranty Information